

Accessories will be required in following conditions:-

A. Roof sheet without any underdeck insulation

- Installation on ridge point / sheet overlapping joint lines – **no accessories required**
- Installation at areas away from ridge / sheet overlapping joint line – **flashing sheet required**



B. Roof sheet with underdeck insulation


- Installation on ridge point / sheet overlapping joint lines – **underdeck insulation retainer ring required.**



- Installation at areas away from ridge / sheet overlapping joint line – **flashing sheet required**

C. Double roof sheet with insulation sandwiched in between. (Gap between roof sheets upto 50mm)

- Installation on ridge point / sheet overlapping joint lines - **Underdeck insulation retainer ring and vertical spacer ring required.**

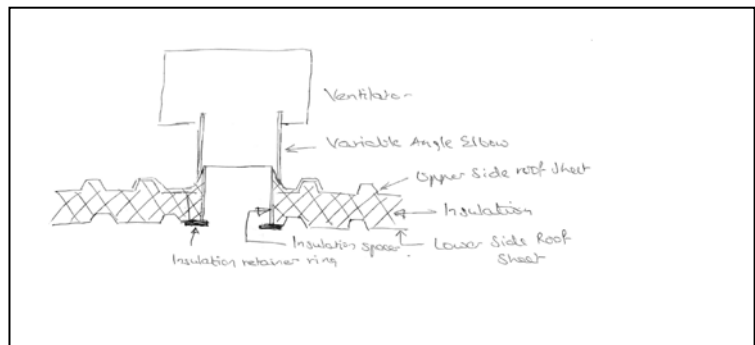

- Installation at areas away from ridge / sheet overlapping joint line – **flashing sheet required**